

SP12T 18GHz

Normally open

◆ RF Features

RF Range (GHz)	Insertion loss (dB)	Isolation (dB)	Standing wave
DC -6	0.3	70	1.3
6 -12	0.4	60	1.4
12 - 18	0.6	50	1.6

◆ Operating voltage/current

Operating voltage (V)		12	24	28
Current(mA)	Normally Open	300	150	140


* The voltage can be selected according to user's requirements.



◆ Product features

- DC to 18GHz
- Low SWR, low loss, high isolation
- Connector form SMA
- TTL level control is selectable

◆ Product dimensions

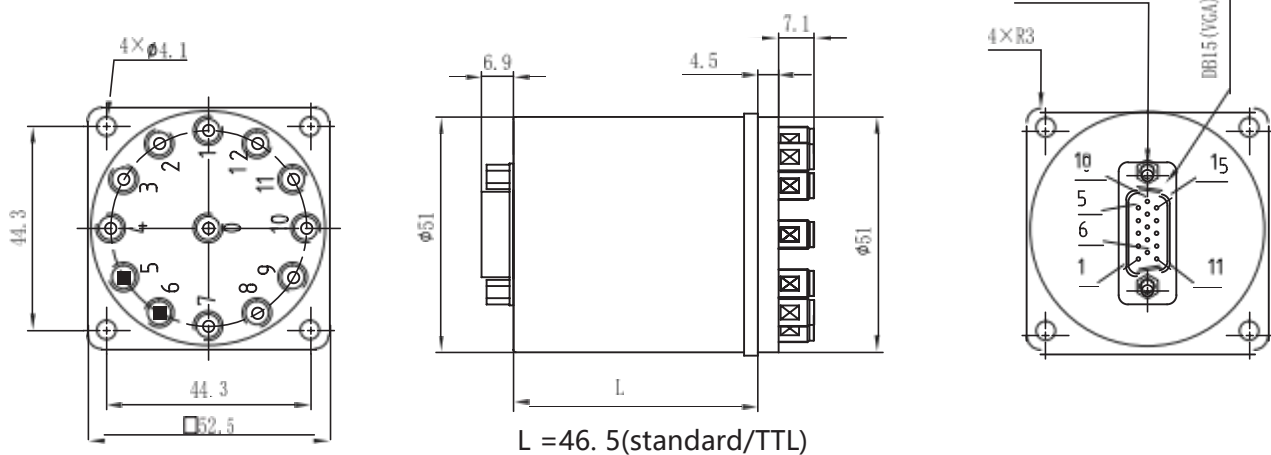

◆ Technical specifications

Switching sequence: first break and then close

Switching rate: <15ms

Operating temperature:

-25°C~65°C (standard)

-55°C~85°C(Temperature expansion)


Switching life: 2 million times

RF connector: SMA Female


Control interface: DB15 Male

Impact (non-working state): 30G, 1/2 Sine, 11ms

Vibration (operating state): 20-2000Hz、10G RMS

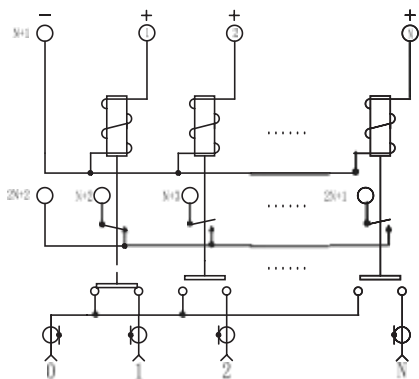

Normally Open

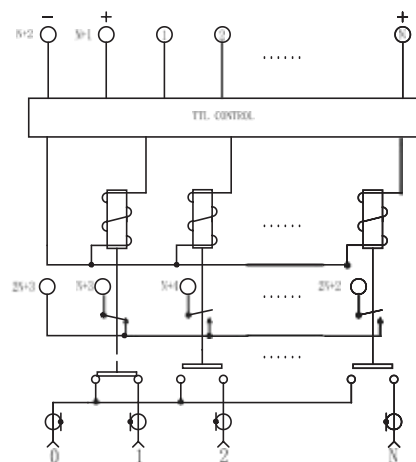

Normally Open+TTL

Switching method SPnT, n=11、12		RF Channel	Pin definition	
			DB15/DB25 MALE	
			Motivation	Feedback
Normally open	NO TTL	0→1	1:VDC, n+1:GND	2n+2→n+2
		0→2	2:VDC, n+1:GND	2n+2→n+3
		0→n	n:VDC, n+1:GND	2n+2→2n+1
	TTL	0→1	1:TTL, n+1:VDC, n+2:GND	2n+3→n+3
		0→2	2:TTL, n+1:VDC, n+2:GND	2n+3→n+4
		0→n	n:TTL, n+1:VDC, n+2:GND	2n+3→2n+2