

SP8T 18GHz

Loaded type

Normally open / Latching

◆ RF Features




RF Range (GHz)	Insertion loss (dB)	Isolation (dB)	Standing wave
DC -6	0.3	70	1.3
6 - 12	0.4	60	1.4
12 - 18	0.5	50	1.5

◆ Operating voltage/current

Operating voltage (V)		12	24	28
Current(mA)	Normally Open	300	200	180
	Latching	320	200	180

* 可根据用户要求选择电压

◆ Product dimensions

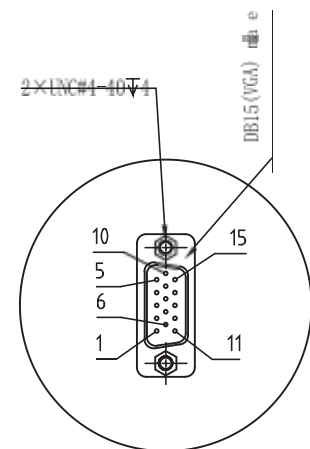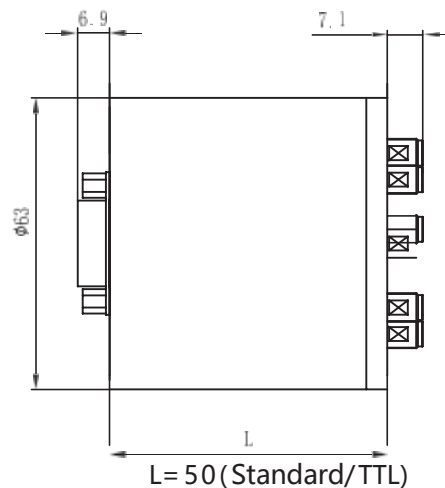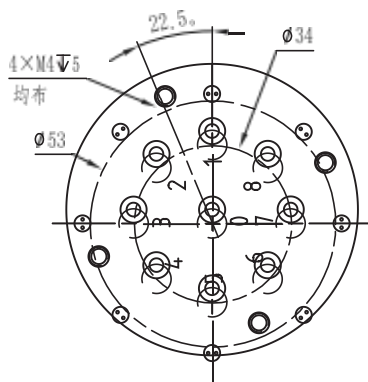

◆ Product features

- DC to 18 GHz
- Low SER, low loss, high isolation
- Connector form SMA
- TTL level control is selectable

◆ Technical specifications

Switching sequence: Break first, then close

Switching rate: <15ms

Operating temperature:

-25°C~65°C (standard)

-55°C~85°C(Temperature expansion)

Switching life: 2 million times

RF connector: SMA Female

Control interface: DB15 Male

Shock (non-working state): 30G、1/2 Sine、11 ms

Vibration (operating state): 20-2000Hz, 10GRMS

SP8T 26.5GHz

Loaded type

Normally open / Latching

◆ RF Features




RF Range (GHz)	Insertion loss (dB)	Isolation (dB)	Standing wave
DC -6	0.3	70	1.3
6 - 12	0.4	60	1.4
12 - 18	0.5	50	1.5
18 -26.5	0.6	50	1.6

◆ Operating voltage/current

Operating voltage (V)		12	24	28
Current (mA)	Normally Open	300	200	180
	Latching	320	200	180

* The voltage can be selected according to user's requirements.

◆ Product dimensions

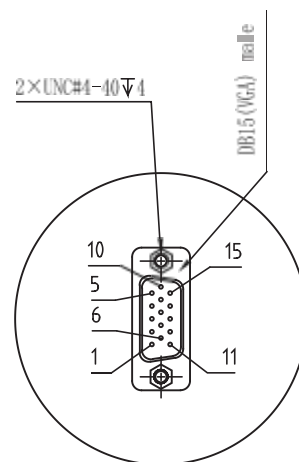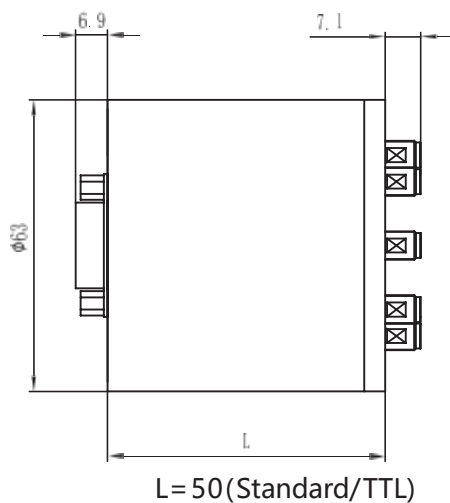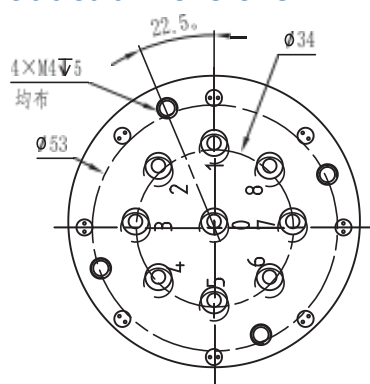


◆ Product features


- DC to 26.5GHz
- Low SWR, low loss, high isolation
- Connector form SMA
- TTL level control is selectable

◆ Technical specifications


Switching sequence: Break first, then close	Switching life: 2 million times	Shock (non-working state): 30G、1/2 Sine、11 ms
Switching rate: <15ms	RF connector: SMA Female	Vibration (operating state): 20-2000Hz, 10GRMS
Operating temperature:	Control interface: DB15 Male	
-25°C~65°C (standard)		
-55°C~85°C(Temperature expansion)		

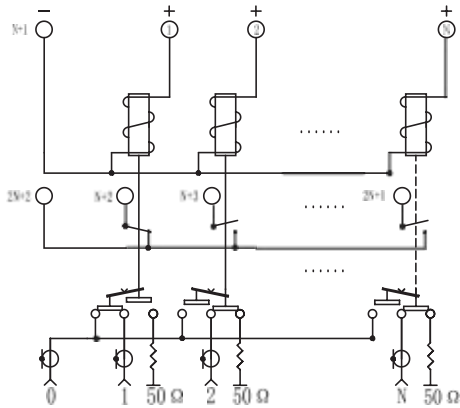


Normally Open

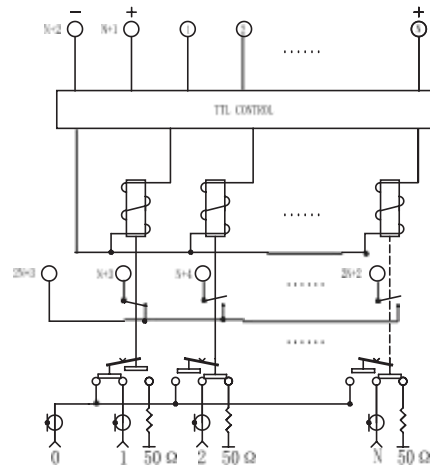

Normally Open+TTL

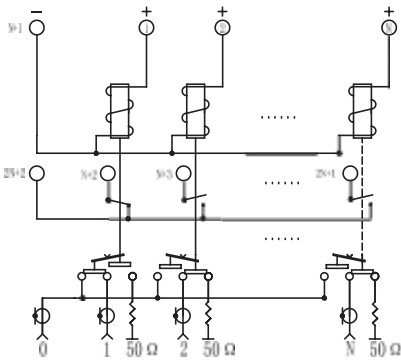

Latching

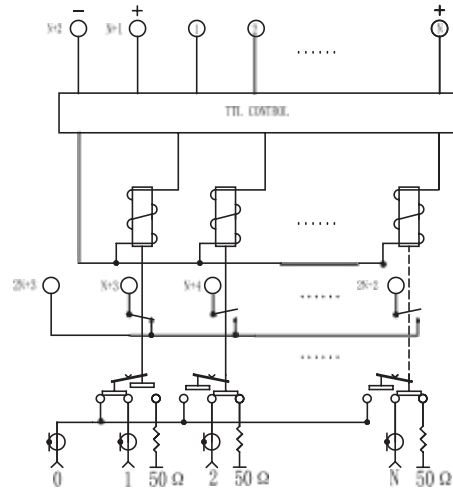

Latching+TTL

Switching method SPnT, n=7、8		RF Channel	Pin definition	
			DB15 / DB 25 MALE	
			Motivation	Feedback
Normally open	NO TTL	0→1	1:VDC, n+1:GND	2n+2→n+2
		0→2	2:VDC, n+1:GND	2n+2→n+3
		0→n	n:VDC, n+1:GND	2n+2→2n+1
	TTL	0→1	1:TTL, n+1:VDC, n+2:GND	2n+3→n+3
		0→2	2:TTL, n+1:VDC, n+2:GND	2n+3→n+4
		0→n	n:TTL, n+1:VDC, n+2:GND	2n+3→2n+2
Latching	NO TTL	0→1	1:VDC, n+1:VDC, n+2:GND	2n+3→n+3
		0→2	2:VDC, n+1:VDC, n+2:GND	2n+3→n+4
		0→n	n:VDC, n+1:VDC, n+2:GND	2n+3→2n+2
	TTL	0→1	1:TTL, n+1:TTL, n+2:VDC, n+3:GND	2n+4→n+4
		0→2	2:TTL, n+1:TTL, n+2:VDC, n+3:GND	2n+4→n+5
		0→n	n:TTL, n+1:TTL, n+2:VDC, n+3:GND	2n+4→2n+3

Note: The Latching switch should be RESET by applying power to pin n+1 before excitation.